

SMU S

Kulmayhde 22°



KUVAUS

Osana S-sarjan viemäreitä SMU S 22° Kulmayhde mahdollistaa suunnanmuutoksen kiinteistöjen viemärijärjestelmissä. Kulmayhde on valurautaa, joka on pinnoitettu punaruskealla kataforesiesieppoksinpinnoitteella.

SUOSITELTU KÄYTTÖ

- Sadevesi
- Tavanomainen jätevesi

STANDARDIT & HYVÄKSYNNÄT

- Toimialan tuotestandardi:
 - EN877
- Akustinen suorituskyky: $L_{sc} \leq 10$ dB(A) & $LaA = 47$ dB(A) standardin EN 14366 testeillä 2L/s virtaamalla.
- Tuotesarjan paloluokitus : A1

Materiaalit & Pinnoitteet


- Valurauta
- Pinnoite: punaruskea, korrosiota estävä kataforesiesieppi, keskimääräinen kuivakalvopaksuus 70 μ m.

TEKNISET OMINAISUUDET

- Kuuman veden kestävyys: 24 tuntia 95°C:ssa.
- Lämpösykliä kestävyys : 1500 sykliä välillä 15°C ja 93°C.
- Kemikaalien kestävyys $2 \leq \text{pH} \leq 12$.
- Suolasuihkun kestävyys sisäpinnoitteelle: yli 350 h.


YMPÄRISTÖTIEDOT

- Kierrätetyn materiaalin osuus tuotteesta : 99 %
- Kierrätettävyyden osuus : Valurauta on 100% kierrätettävissä olemassaolevan kierrätysverkoston kautta.
Lähde: EPD Ympäristöseloste
Environmental Product Declaration S-P-02013



SMU S

Kulmayhde 22°

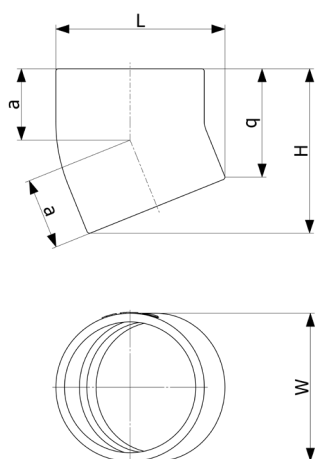

DN	L	H	W	a	q	Paino	Tuotenumero	LVI-numero
50	70	88	58	40	66	0.45	156388	0204 101
DE75	90	110	75	47?	82	0.74	155101	0204 102
100	126	125	110	54	84	1.3	156598	0204 103
125*	152*	143*	135*	61*	92*	1.9*	156761*	*
150	179	162	160	69	102	2.6	156855	0204 105
200	233	200	210	83	122	4.4	156974	0204 106
250	300	240	274	100	138	9.5	157071	0204 107
300*	356*	279*	326*	115*	157*	15.3*	157136*	0204 108*
400*	466*	324*	429*	142*	177*	23.7*	170730*	*

Kaikki mitat ovat yksikössä mm ja nimellispainot yksikössä kg
*Ei kuulu Saint-Gobain PAM Finland tuotevalikoimaan

This document is provided for information purposes only and our company reserves the right to modify the information contained herein at any time. Our company declines all responsibility in the event of the use or installation of materials that do not comply with the rules prescribed in this document as well as with the standards, the technical documents and the applicable professional standards. Any orders placed will be subject to our General Terms and Conditions of Sale, available on request. The drawings and/or images are the exclusive property of Saint-Gobain PAM and are confidential. They must not be reproduced or disclosed to any third party without written consent. They may only be used for the purpose for which they were issued and are returnable on request.

Saint-Gobain PAM Bâtiment

21 avenue Camille Cavalier - BP 129 • 54705 • PONT-À-MOUSSON • France • Tel: +33 (0) 383 807 808 • Email: tcbatiment.sgpam@saint-gobain.com • www.pambuilding.com
Société par action simplifiée au capital de 6 812 970,75€ • SIREN 799 283 882 • RCS NANCY